

Contents 目录

21-26	1000 Series Door Closer 1000系列闭门器
27-32	2000 Series Door Closer 2000系列闭门器
33-36	3000 Series Door Closer 3000系列闭门器
37-42	5000 Series Door Closer 5000系列闭门器
43-45	6000 Series Door Closer 6000系列闭门器
46-49	7000 Series Door Closer 7000系列闭门器
50-58	8000 Series Door Closer 8000系列闭门器
59-61	8100 Series Door Closer 8100系列闭门器
62-64	96 Series Door Closer 96系列闭门器
65-66	9000 Series Door Closer 9000系列闭门器


- The Main Drafter of China National Standard of Door Closer Floor Spring Door Accessories
- The Vice Chief of the Hardware Association Profession Committee of China
- The Member of the Security&Protection Industry Association of China
- The Director of the Hardware Association of China
- The Vice Chief of the Wenzhou Hardware Commercial Association
- The Member of the Wenzhou International Commercial Association
- The Technology Innovation Enterprise of Zhejiang Province
- The Technology Innovation Enterprise of Wenzhou City.
- The Demonstration Enterprise in Wenzhou Economic and Development Zone
- 国家行业标准《闭门器》、地弹簧、《装饰门用附属配件》主要起草单位
- 中国五金制品协会五金专业委员会副会长单位
- 中国安全防范单位行业协会会员单位
- 中国五金制品协会理事单位
- 中国·温州五金商会副会长单位
- 中国·温州国际商会会员单位
- 浙江省科技(创新)型企业
- 温州市科技(创新)型企业
- 温州经济开发区专利示范企业



SALES NETWORK 销售网络

OUDE has established an integrated and organic sales network covering all over China. With this network, we can provide products with all needs anytime for your convenience in every province, city and district. We are also working on expanding internationally, covering Europe, America, Mid-east Asia, and Africa, which has founded OUDE's solid internationalization scale. Achievement needs celebration, sharing, fresh flowers, champagne, honor, sweat...Though we have got some achievements, we pay more attention to customers and share our joy with our customers. We believe that customers' success equals OUDE's.

欧德目前在全国各地建立了完整的立体式覆盖销售网络，各省市地区均有销售网点和代理点，随时为您提供你所需要的产品。欧德也已经战略部署国际市场，产品远销欧洲、美洲、中东、非洲等各地。为国际化欧德、世界化的欧德打下了坚实的基础。成功需要分享，鲜花、香槟、勋章、汗水…虽然取得一定的成绩，但我们更注重和众多客户共享成功的喜悦。我们坚信，客户的成功便是欧德的成功。

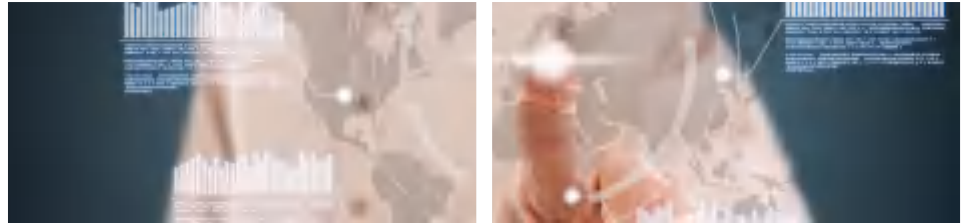


OD1000Series

OUDE door closer is manufactured according to QB/T2698-2005 National Standard.
Above 1,000,000 cycles guaranteed in endurance(300,000 cycles guarateed by superior products of GB9350-88 National standard.)




OD1000Series

OUDE door closer is manufactured according to QB/T2698-2005 National Standard.
Above 1,000,000 cycles guaranteed in endurance(300,000 cycles guarateed by superior products of GB9350-88 National standard.)

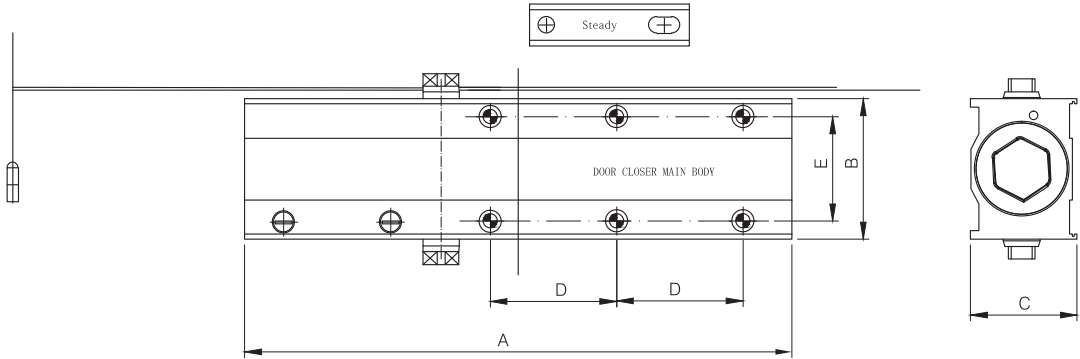


主要参数 Main parameter									
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E				
1123AW	195	50	38	45	37	45~65	≤950	双段调速 Latching closing adjustable	


OD1000Series



OUDE®
Professional
door closer manufacturer

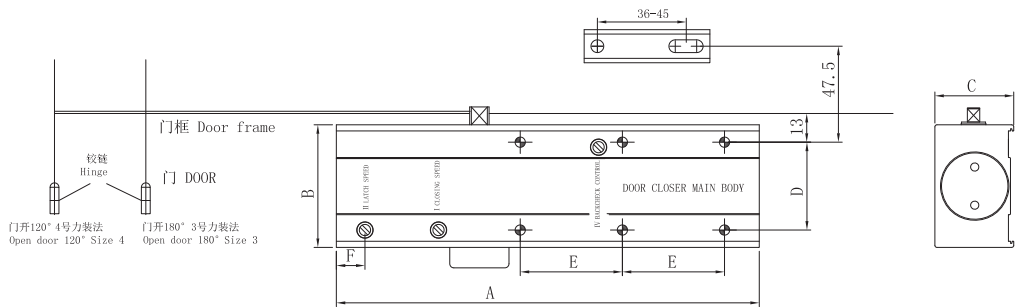

主要参数 Main parameter										
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension			适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E	F				
1133AW	207	60	38.5	43	50	14	40~65	≤950	双段调速 Latching/closing adjustable	可配滑轨安装带停门功能 Sliding guide arm Hold open optional
1134AW	207	60	38.5	43	50	14	60~85	≤1050	双段调速 Latching/closing adjustable	
1133BW	207	60	38.5	43	50	14	40~65	≤950	双段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable	
1134BW	207	60	38.5	43	50	14	60~85	≤1050	双段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable	

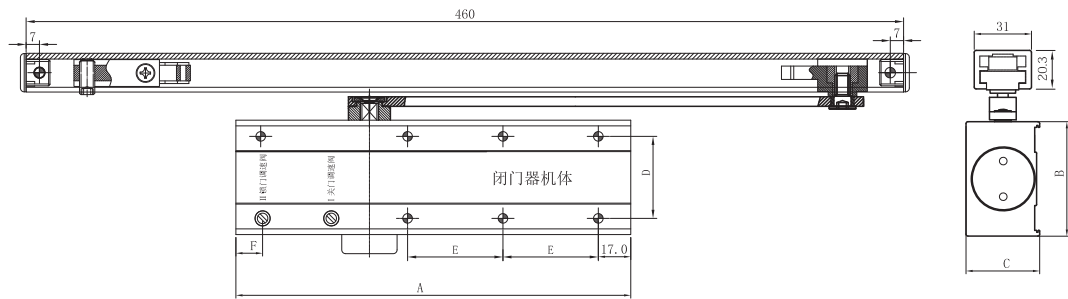

主要参数 Main parameter										
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension			适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E	F				
1143AWH	236	60	38.5	43	50	14	40~65	≤950	双段调速 Latching/closing adjustable	滑轨安装带停门功能 Sliding guide arm Hold open optional
1133AWH	207	60	38.5	43	50	14	40~65	≤950	双段调速 Latching/closing adjustable	

DOOR CLOSER


The OUDE product pays great attention to each detail, starts from each components, strictly checks, lets each constituent the error reduce to lowest, because OUDE continuously pursues the highest quality.

OD1000Series

OD1000Series




力度调节
moment of force adjustment

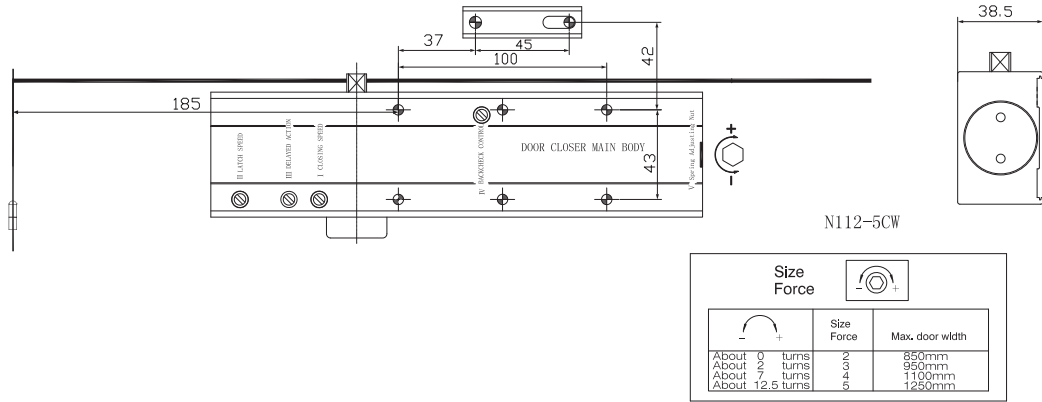


主要参数 Main parameter									
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E				
112-5CW	236	60	38.5	43	50	25~120	≤1200	二段调速/缓冲、延时功能 Latching/closing adjustable Backcheck Delay action adjustable	具备力度调节功能 Power adjustable by spring (BC,DA)

OD2000Series

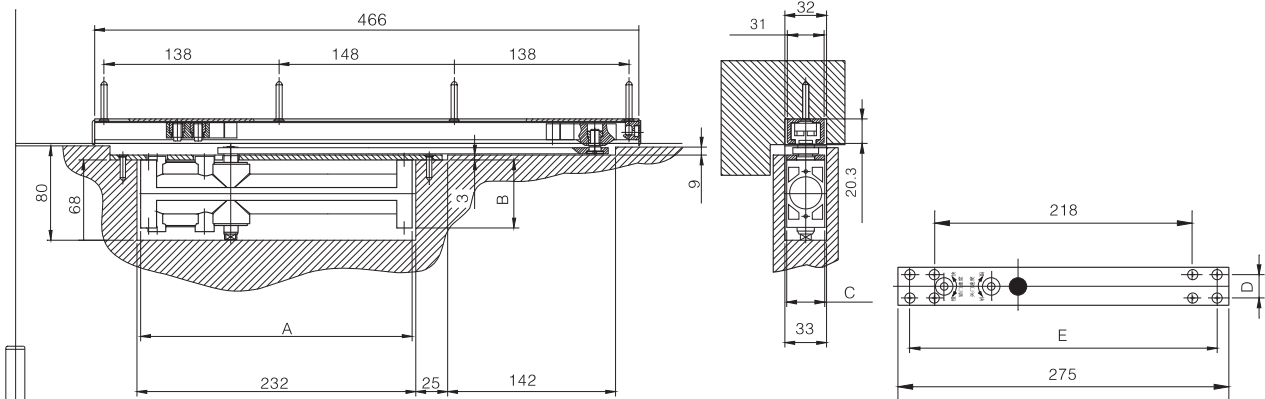

主要参数 Main parameter						
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E	
2022AWH	230	57	32	20	260	25 ~ 45 ≤900 双段调速 Latching/closing adjustable
2023AWH	230	57	32	20	260	40 ~ 65 ≤950 双段调速 Latching/closing adjustable
2024AWH	230	57	32	20	260	60 ~ 85 ≤1050 双段调速 Latching/closing adjustable

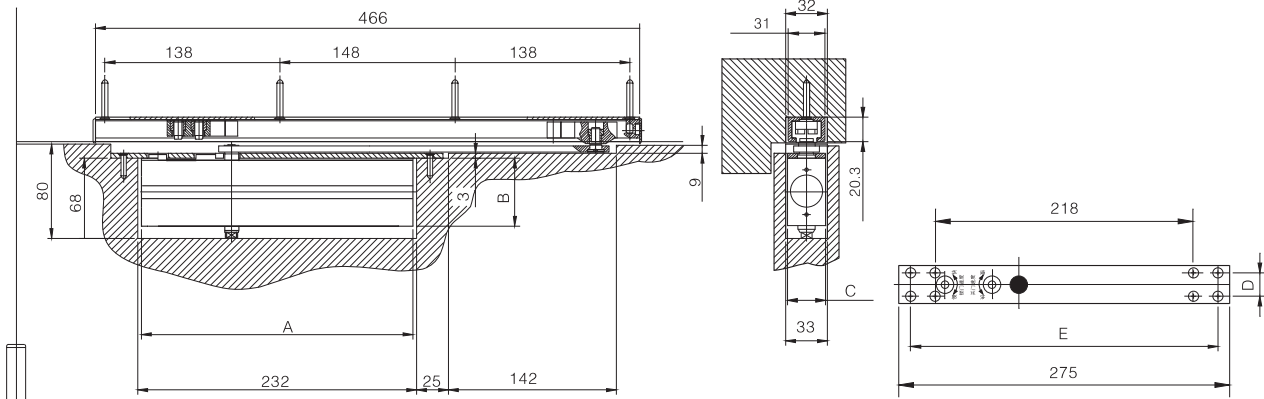


主要参数 Main parameter						
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E	
2122AWH	230	57	32	20	260	25 ~ 45 ≤900 双段调速 Latching/closing adjustable
2123AWH	230	57	32	20	260	40 ~ 65 ≤950 双段调速 Latching/closing adjustable
2124AWH	230	57	32	20	260	60 ~ 85 ≤1050 双段调速 Latching/closing adjustable


OD2000Series



OD2000Series

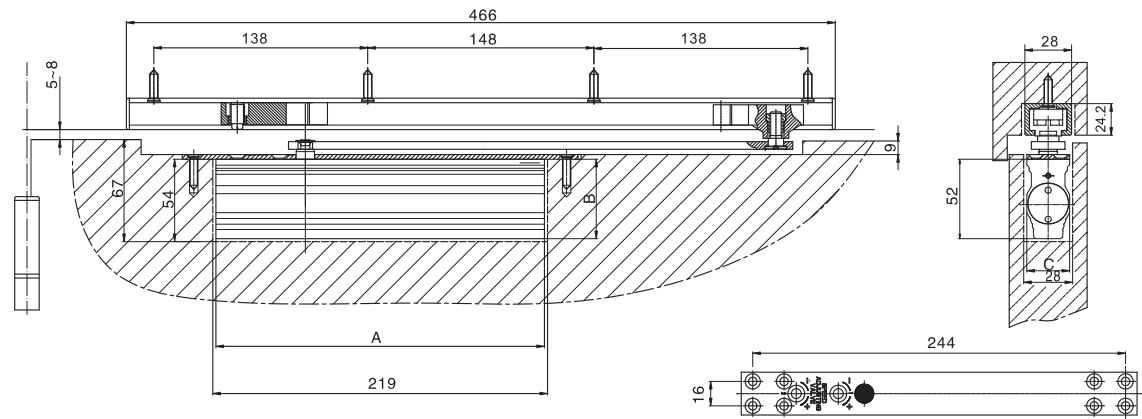


主要参数 Main parameter						
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E	
2113AWH	215	52	28	16	244	适用门重 Applicable door weight(kg) 45 ~ 65 适用门宽 Applicable door width(mm) ≤950 具备功能 Function 二段调速/不分左右手 Latching/closing adjustable Non-handed install (铝型材本体) Sliding guide arm Hold open optional (Aluminum Extruded Body)

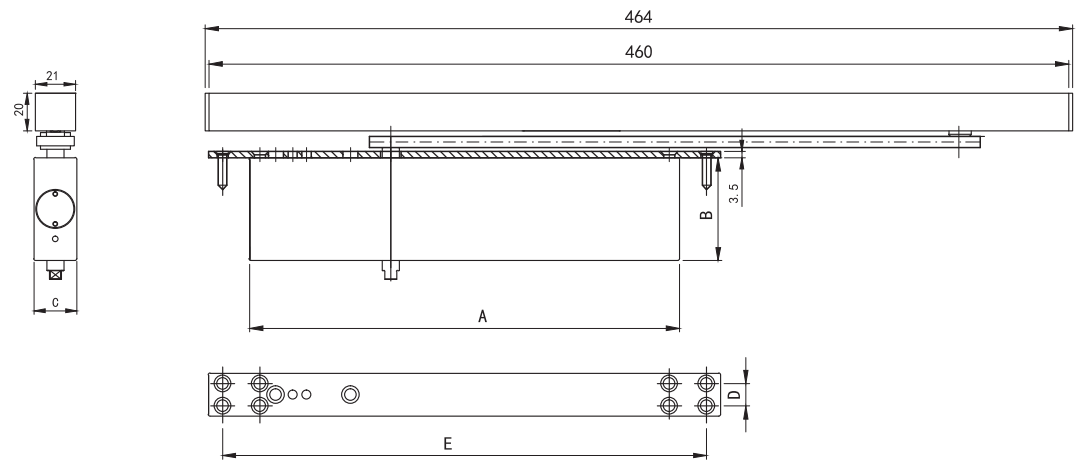

主要参数 Main parameter						
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E	
2112AWH	230	55	23	12	259	适用门重 Applicable door weight(kg) ≤45 适用门宽 Applicable door width(mm) ≤850 具备功能 Function 超薄型/二段调速 Super slim type Latching/closing adjustable (铝型材本体) Sliding guide arm Hold open optional (Aluminum Extruded Body)

OD2000Series

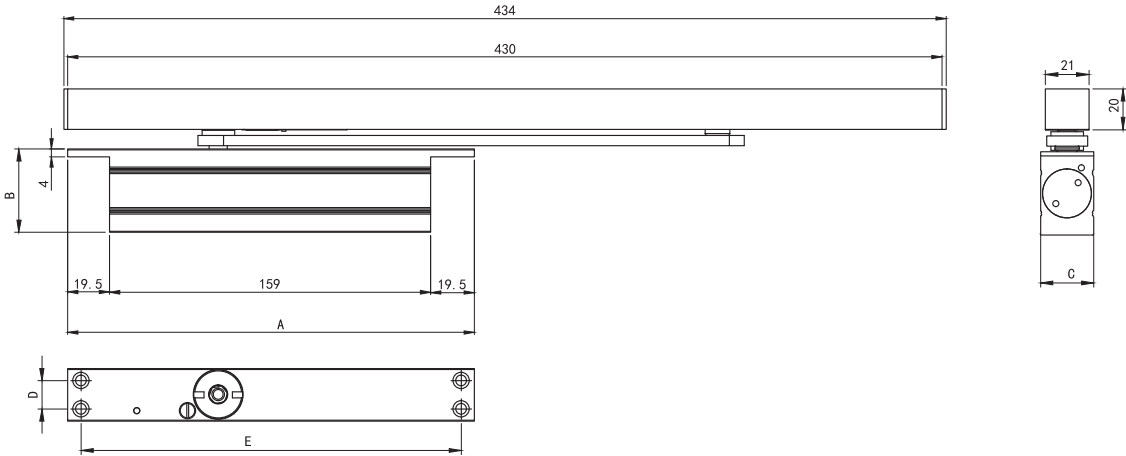

主要参数 Main parameter						
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)
	A	B	C	D	E	
C2101AWH	198	41	26	14	187	≤25
						≤750
						适用于闭窗器、卫生间 单段调速 Use for windows bathroom doors Single speed range adjusting
						配滑轨摇臂 Sliding channel install



OD2000Series

Delay shutdown function:When shutdown in the scope of 180–65,the door will be in waiting state and the entering and exiting spare will be much bigger and more comfortable Backcheck function:When opens the door exceeding 65, the door closer will produce a certain Damping force to avoid opening force too big and speed too fast that can make one run Up against a stone wall.The damping force is adjustable.



OD3000Series

Delay shutdown function:When shutdown in the scope of 180-65,the door will be in waiting state and the entering and exiting spare will be much bigger and more comfortable Backcheck function:When opens the door exceeding 65, the door closer will produce a certain Damping force to avoid opening force too big and speed too fast that can make one run Up against a stone wall.The damping force is adjustable.




入锁速度调节
latching speed adjusted valve



关闭速度调节
closing speed adjusted valve



BC缓冲

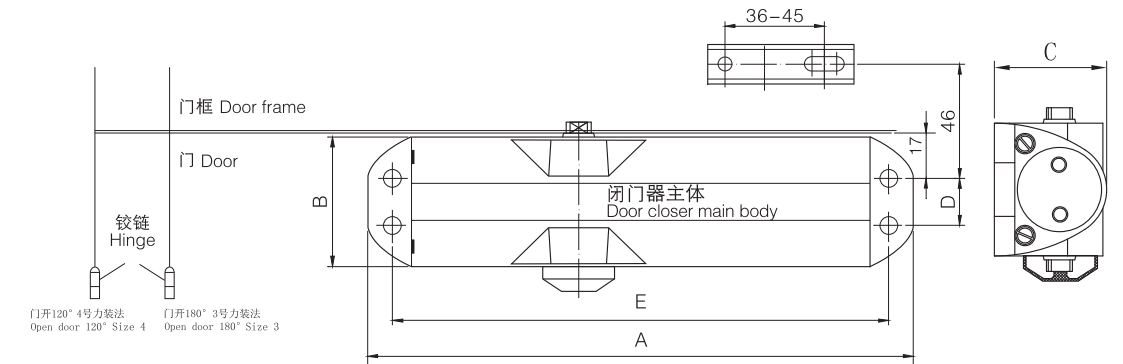

主要参数 Main parameter									
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E				
3022AW	220	52	45	19	202	25 ~ 45	≤900	双段调速 Latching/closing adjustable	
3023AW	220	52	45	19	202	40 ~ 65	≤950	双段调速 Latching/closing adjustable	
3023AD	220	52	45	19	202	40 ~ 65	≤950	双段调速/停门功能 Latching/closing adjustable Hold open	
3023BW	220	52	45	19	202	40 ~ 65	≤950	双段双速/缓冲功能 Closing/latching speed adjustable Backcheck adjustable	




入锁速度调节
latching speed adjusted valve


关闭速度调节
closing speed adjusted valve



力度调节
moment of force adjustment

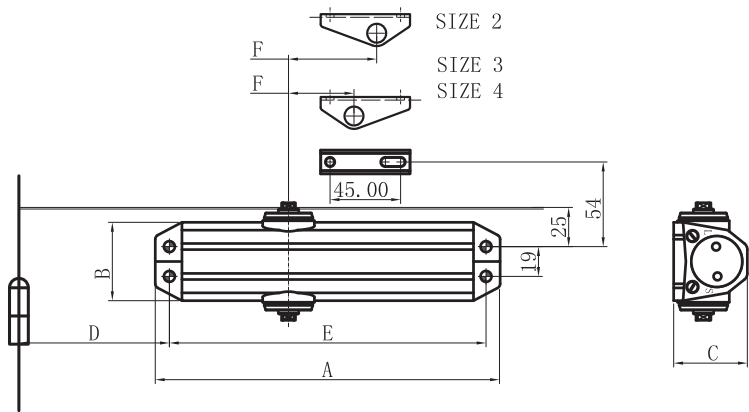

主要参数 Main parameter											
Item	Closer Size	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension			适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
		A	B	C	D	E	F				
D3023AW	3#	220	50	47	96	202	59	≤60	≤950	双段双速/缓冲功能 (力度可移位2、3、4) Closing/latching speed adjustable Backcheck adjustable (EN2/3/4 by template)	
D3023BW	3#	220	50	47	96	202	59	≤60	≤950	双段双速/缓冲功能 (力度可移位2、3、4) Closing/latching speed adjustable Backcheck adjustable (EN2/3/4 by template)	

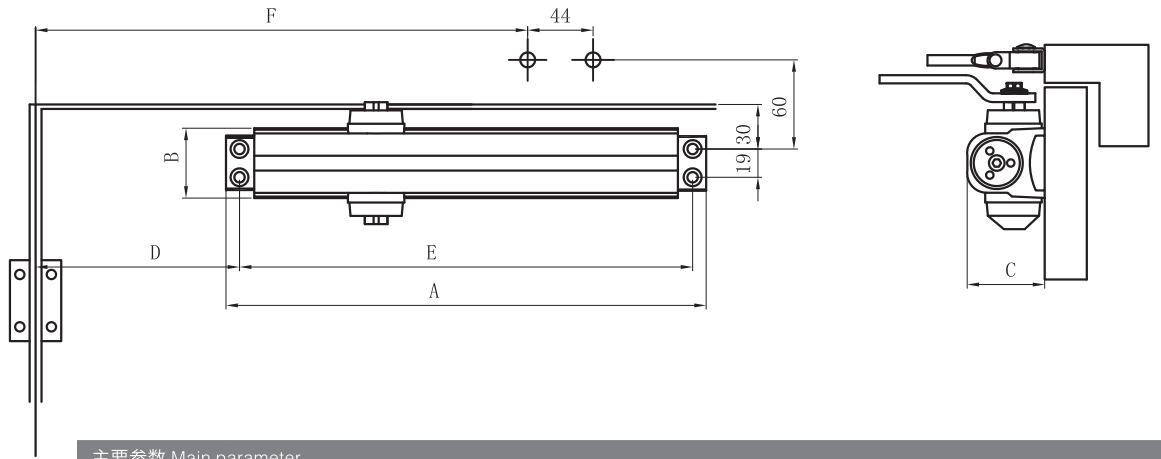


主要参数 Main parameter												
Item	Closer Size	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension			适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	最大开门角度 Maximun opening angle	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
		A	B	C	D	E	F					
301-6BW	1#-6#	323	47	52	191	305	331	≤150	≤1500	100°	双段双速/缓冲、力度调节功能 Closing/latching speed adjustable Backcheck Spring power adjustable	
301-6BW	1#-6#	323	47	52	152	305	292	≤150	≤1500	130°	双段双速/缓冲、力度调节功能 Closing/latching speed adjustable Backcheck Spring power adjustable	
301-6BW	1#-6#	323	47	52	114	305	254	≤150	≤1500	180°	双段双速/缓冲、力度调节功能 Closing/latching speed adjustable Backcheck Spring power adjustable	

OD5000Series



关闭速度调节
closing speed adjusted valve

入锁速度调节
latching speed adjusted valve

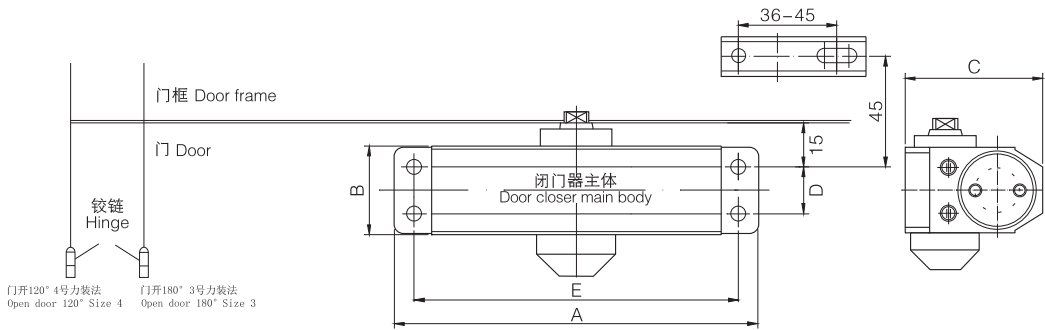


主要参数 Main parameter									
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 weight(kg)	适用门宽 width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E				
5012AW	148	36.5	56	19	132	25 ~ 45	≤900	二段调速 Latching/closing adjustable	
5012AD	148	36.5	56	19	132	25 ~ 45	≤900	二段调速/停门功能 Latching/closing adjustable Hold open	
5013AW	148	36.5	56	19	132	40 ~ 65	≤950	二段调速 Latching/closing adjustable	
5013AD	148	36.5	56	19	132	40 ~ 65	≤950	二段调速/停门功能 Latching/closing adjustable Hold open	

OD5000Series




关闭速度调节
closing speed adjusted valve

入锁速度调节
latching speed adjusted valve

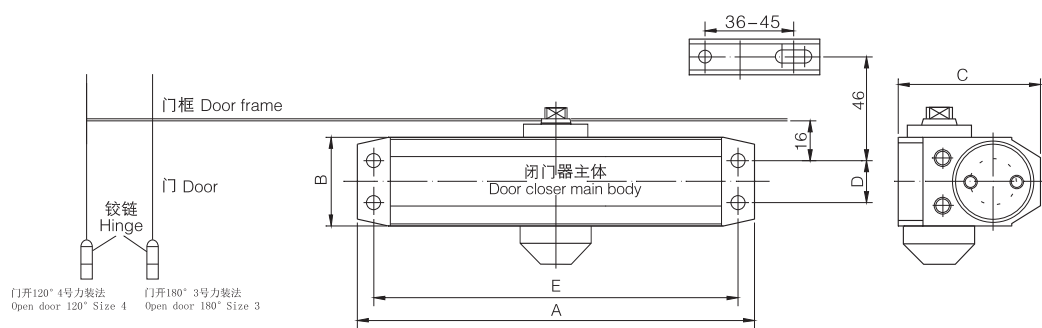


主要参数 Main parameter									
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E				
5022AW	180	40	63	19	165	25 ~ 45	≤900	二段调速 Latching/closing adjustable	
5022AD	180	40	63	19	165	25 ~ 45	≤900	二段调速/停门功能 Latching/closing adjustable Hold open	
5023AW	180	40	63	19	165	40 ~ 65	≤950	二段调速 Latching/closing adjustable	
5023AD	180	40	63	19	165	40 ~ 65	≤950	二段调速/停门功能 Latching/closing adjustable Hold open	

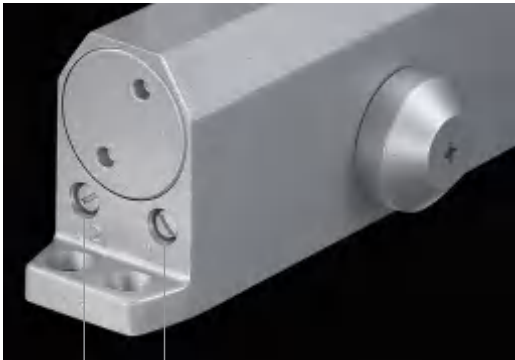


关闭速度调节
closing speed adjusted valve

入锁速度调节
latching speed adjusted valve

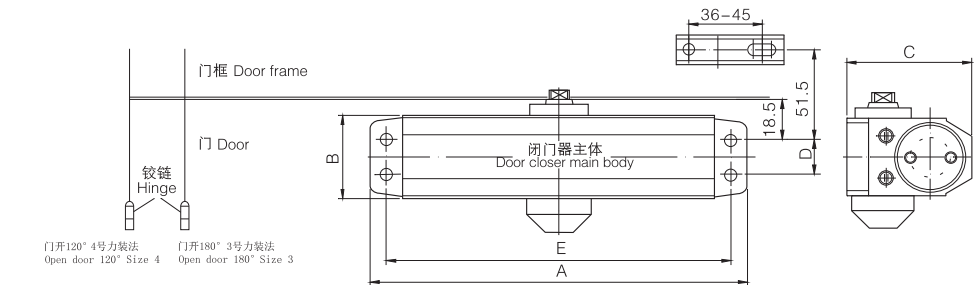

主要参数 Main parameter								
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function
	A	B	C	D	E			
5033AW	206	44.5	68	19	188	40 ~ 65	≤950	双段调速 Latching/closing adjustable
5033AD	206	44.5	68	19	188	40 ~ 65	≤950	双段调速/停门功能 Latching/closing adjustable / Hold open
5034AW	206	44.5	68	19	188	60 ~ 85	≤1050	双段调速 Latching/closing adjustable
5034AD	206	44.5	68	19	188	60 ~ 85	≤1050	双段调速/停门功能 Latching/closing adjustable / Hold open
N5033AW	206	41.5	62.5	19	188	60 ~ 85	≤1050	双段调速/停门功能 Latching/closing adjustable / Hold open

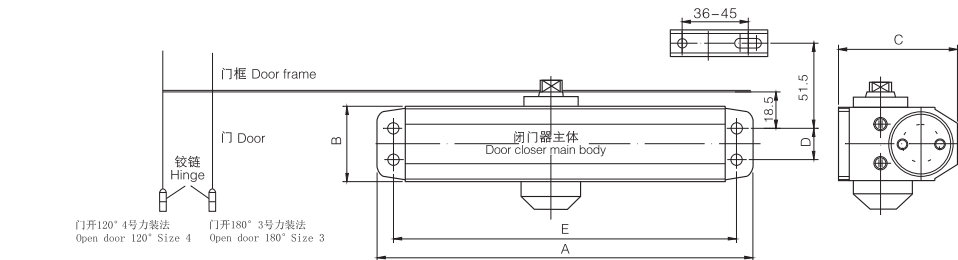

主要参数 Main parameter								
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function
	A	B	C	D	E			
5044AW	226	44.5	72	19	208	60 ~ 85	≤1050	双段调速 Latching/closing adjustable
5044BW	226	44.5	72	19	208	60 ~ 85	≤1050	双段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable
5045AW	226	44.5	72	19	208	80 ~ 120	≤1200	双段调速 Latching/closing adjustable
5045BW	226	44.5	72	19	208	80 ~ 120	≤1200	双段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable

OD5000Series




关闭速度调节
closing speed adjusted valve

入锁速度调节
latching speed adjusted valve



BC (缓冲) 功能
BC (buffer) function

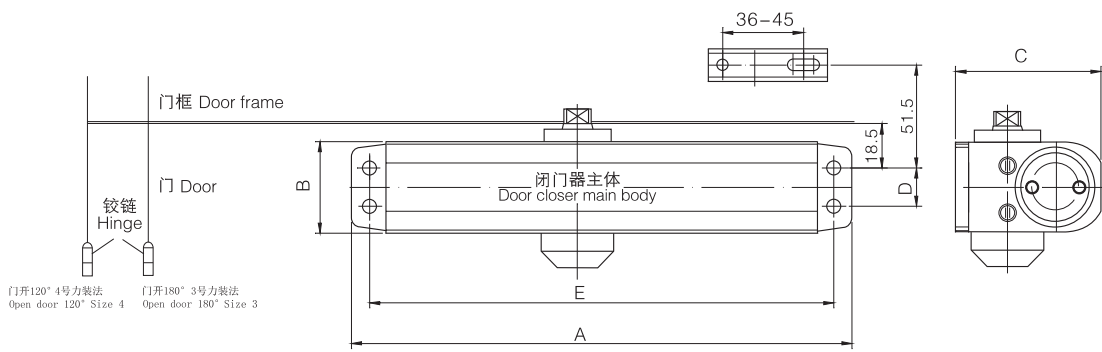

主要参数 Main parameter								
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function
	A	B	C	D	E			
5055AW	248	44.5	72	19	230	80 ~ 120	≤1200	双段调速 Latching/closing adjustable
5055BW	248	44.5	72	19	230	80 ~ 120	≤1200	双段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable
5056AW	248	44.5	72	19	230	100 ~ 150	≤1500	双段调速 Latching/closing adjustable
5056BW	248	44.5	72	19	230	100 ~ 150	≤1500	双段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable




PSS罩壳
PPS Cover

Adjustable function of shutdown force:
The function can make the shutdown force continuously adjustable to meet doors with different sizes and weight.
Stop door function at 90 degrees:
When the door opens from 90 to 180 degrees, the door can keep stopping.



OD6000 Series

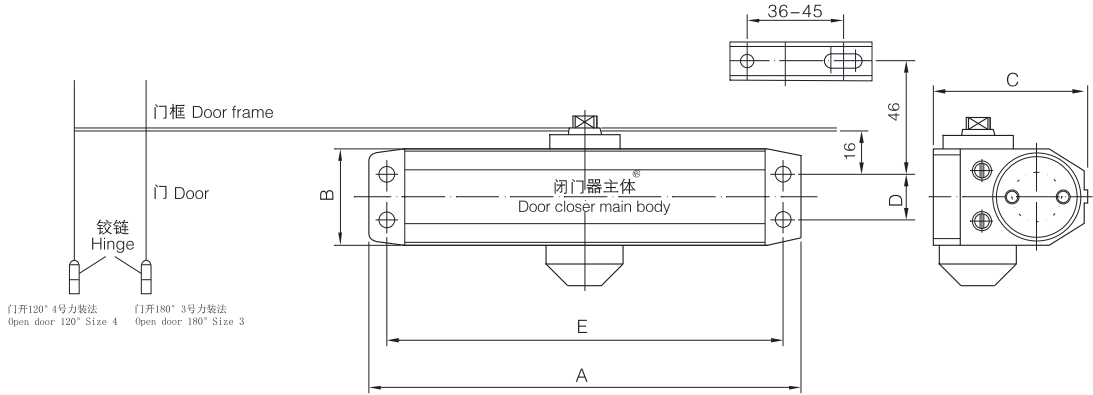

BC (缓冲) 功能
BC (buffer) function


力度调节
moment of force adjustment

主要参数 Main parameter									
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E				
601-6BW	248	44.5	70	19	230	15~150	≤1500	双段调速/缓冲、力度调节功能 Latching/closing adjustable Backcheck Spring power adjustable	具有力量可调功能 Power adjustable by spring

OD6000



OUDE door closer is manufactured according to QB/T2698–2005 National Standard
Above 1.000,000 cycles guaranteed in endurance (300.000 cycles guarateed by superior
products of GB9350–88 National standard.)

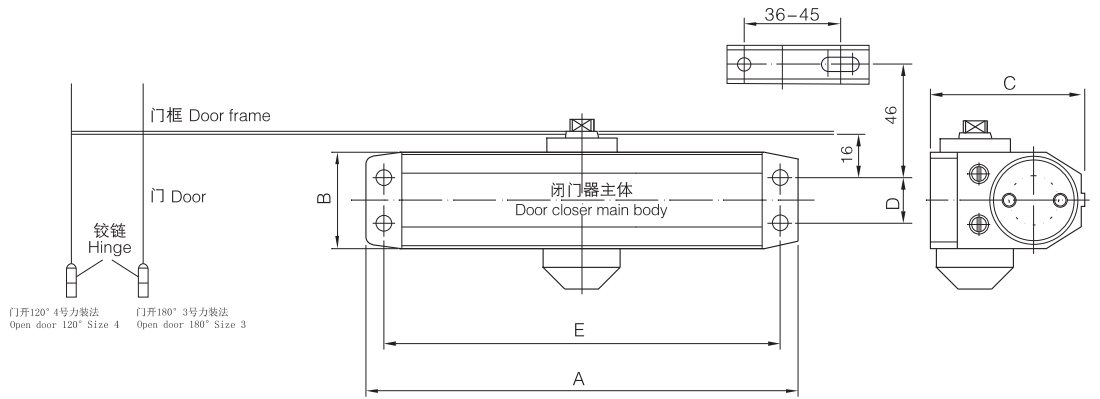

关闭速度调节
closing speed adjusted valve

入锁速度调节
latching speed adjusted valve

主要参数 Main parameter									
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E				
6023AW	168	41.5	63	19	152	40~65	≤950	二段调速 Latching/closing adjustable	
6023AD	168	41.5	63	19	152	40~65	≤950	二段调速/停门功能 Latching/closing adjustable Hold open	
6033AW	186	44.5	68	19	168	40~65	≤950	二段调速 Latching/closing adjustable	
6033AD	186	44.5	68	19	168	40~65	≤950	二段调速/停门功能 Latching/closing adjustable Hold open	
6034AW	186	44.5	68	19	168	60~85	≤1050	二段调速 Latching/closing adjustable	
6034AD	186	44.5	68	19	168	60~85	≤1050	二段调速/停门功能 Latching/closing adjustable Hold open	
N6033AW	186	41.5	62.5	19	168	40~65	≤950		

OD7000Series




关闭速度调节
closing speed adjusted valve

入锁速度调节
latching speed adjusted valve




BC (缓冲) 功能
BC (buffer) function

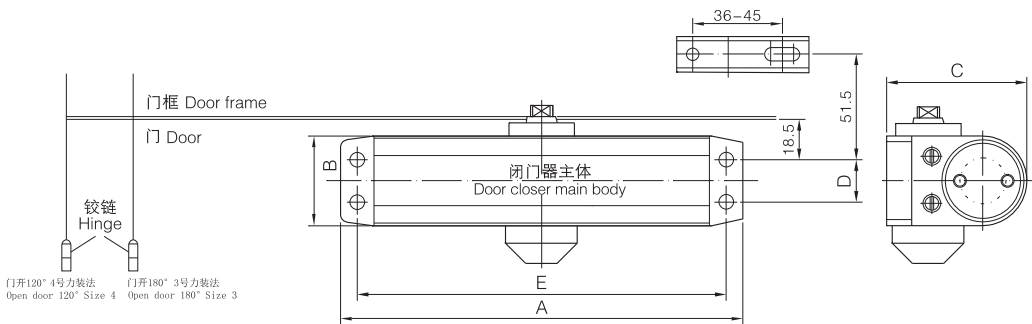



主要参数 Main parameter						
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)
	A	B	C	D	E	
7055AW	248	44.5	72	19	230	80 ~ 120
7055BW	248	44.5	72	19	230	80 ~ 120
7056AW	248	44.5	72	19	230	100 ~ 150
7056BW	248	44.5	72	19	230	100 ~ 150

适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
≤1200	二段调速 Latching/closing adjustable	可以具有力矩调节功能 Spring power adjusting optional
≤1200	二段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable	
≤1500	二段调速 Latching/closing adjustable	
≤1500	二段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable	

OD8000Series

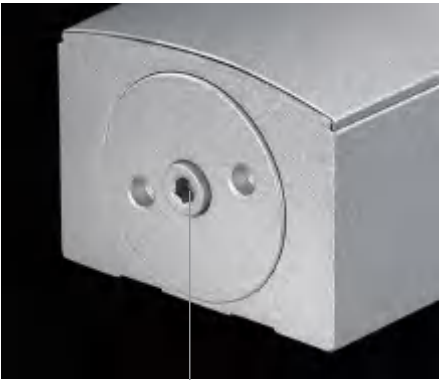

力度调节
moment of force adjustment

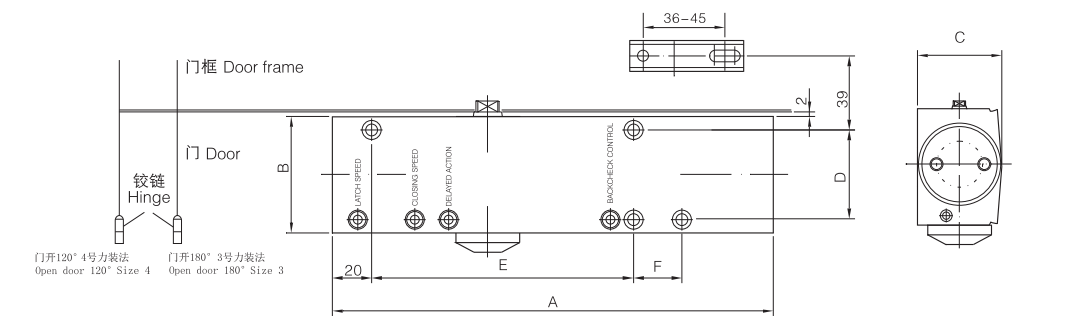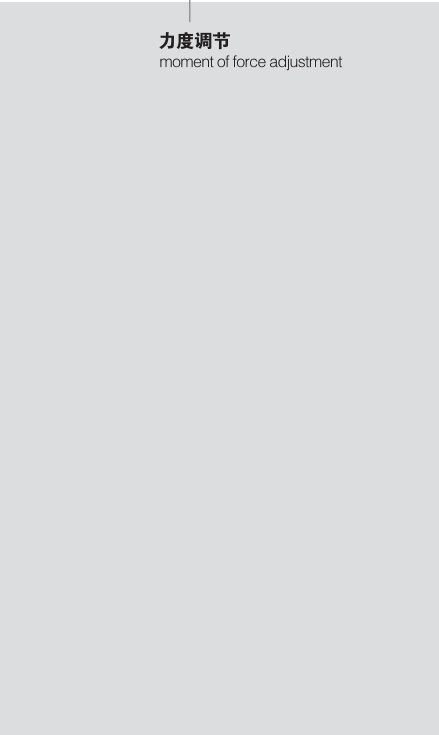


主要参数 Main parameter						
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)
	A	B	C	D	E	
812-5BW	226	60	43.5	44	135	25 ~ 120
812-5CW	226	60	43.5	44	135	25 ~ 120
813-6CW	287	60	43.5	44	135	60 ~ 150

适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
≤1200	关门、锁门力可调/缓冲功能 Latching/closing adjustable Backcheck adjustable	具有力度调节功能 Power adjustable by spring
≤1200	关门、锁门力可调/缓冲、延时功能 Latching/closing adjustable Backcheck Delay action adjustable	
≤1500	关门、锁门力可调/缓冲、延时功能 Latching/closing adjustable Backcheck Delay action adjustable	

8000、8100系列闭门器外形美观、大方,具有很强的装饰性。812-5、813-6系列闭门器壳体为铝型材,结构先进、性能稳定。安装后调整锁位于闭门器上面或下面,调整后使用方便,舒适是倍受顾客欢迎的产品。


8000 系列 door closers are beautiful and graceful in appearance with stronger ornamental Model 812-5、813-6 door closers, which is made of aluminum material and provided with advanced construction and reliable performance. The governing valve is located at the upper and down of the door closers. After installing, it is convenient and comfortable for adjusting opening and using. It is one of products welcomed by customers.

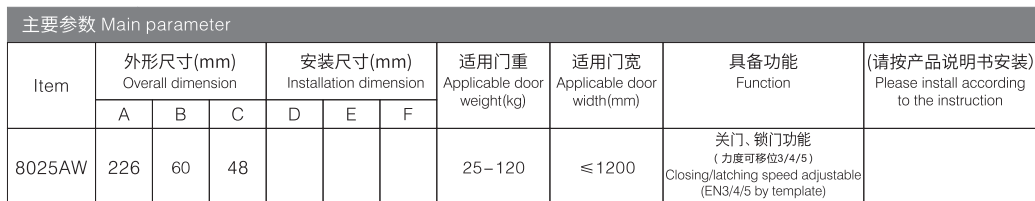

OD8000Series




力度调节
moment of force adjustment

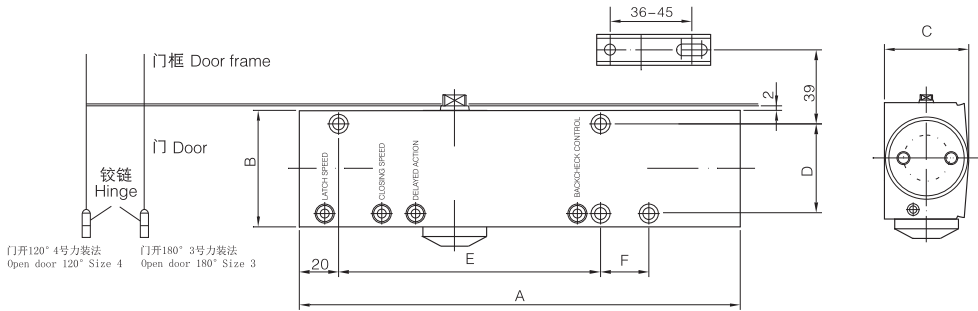


主要参数 Main parameter									
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension			适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function
	A	B	C	D	E	F			
802-5BW	227	60	43.5	44	135	25	25-120	≤1200	关门、锁门力可调/缓冲功能 Latching/closing adjustable Backcheck adjustable
802-5CW	227	60	43.5	44	135	25	25-120	≤1200	关门、锁门力可调/缓冲、延时功能 Latching/closing adjustable Backcheck Delay action adjustable

(请按产品说明书安装)
Please install according to the instruction

具有力度调节功能
Power adjustable by spring

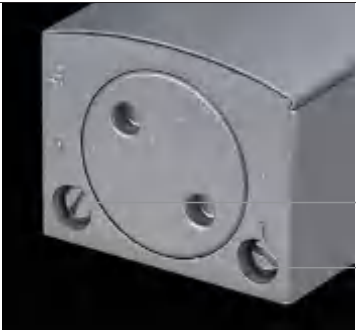

入锁速度调节
latching speed adjusted valve

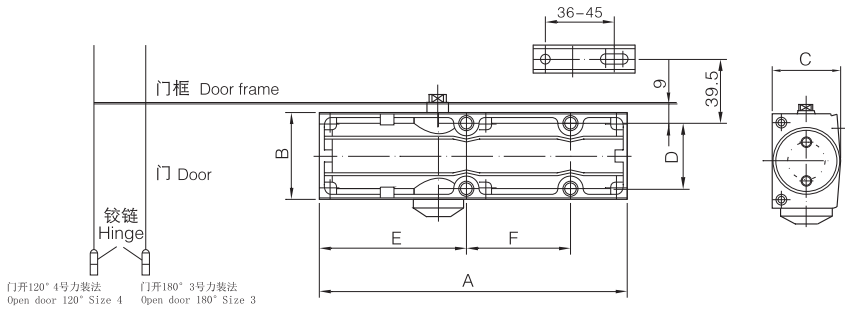


关闭速度调节
closing speed adjusted valve

主要参数 Main parameter									
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension			适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function
	A	B	C	D	E	F			
8022AW	178	50	38	38	86	60	25 ~ 45	≤900	二段调速 Latching/closing adjustable
8023AW	178	50	38	38	86	60	45-65	≤950	二段调速 Latching/closing adjustable
8023BW	178	50	38	38	86	60	45-65	≤950	二段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable
8023AD	178	50	38	38	86	60	45-65	≤950	二段调速/停门功能 Latching/closing adjustable Hold open

(请按产品说明书安装)
Please install according to the instruction

OD8000Series

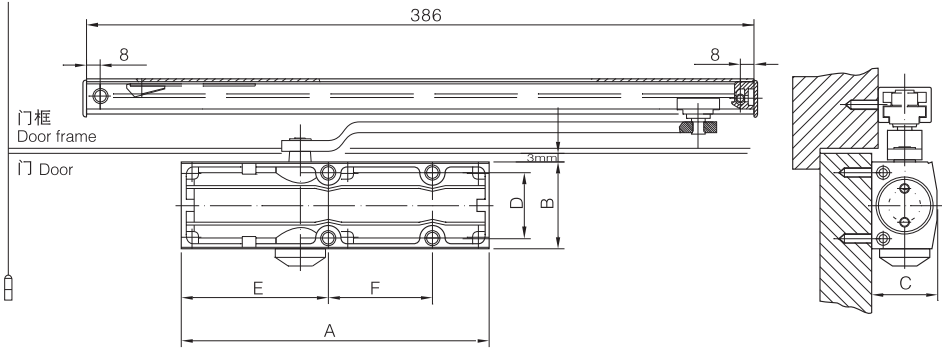

主要参数 Main parameter										
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension			适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E	F				
8023AWH	178	50	38	38	86	60	40 ~ 65	≤950	二段调速 Latching/closing adjustable	配滑轨摇臂、带停门功能 Sliding guide arm Hold open optional



8000电镀罩壳serie
Electroplate Cover series



PVD




PSS



MAB




SS



PVD



PSS



MAB



SS

LS3电镀伸缩摇臂
LS3 Electroplate TELESCOPIC ARM




定位摇臂
Hold-open Arm



平行板
Parallel bracket



安装底板
Mount Plant

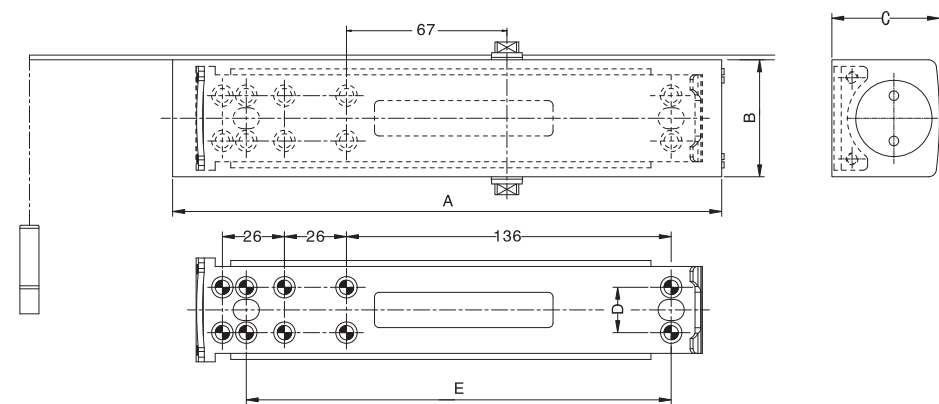


入锁速度调节
latching speed adjusted valve

关闭速度调节
closing speed adjusted valve

主要参数 Main parameter								
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function
	A	B	C	D	E			
8032AW	230	49	45.1	19	178	25~45	≤850	双段调速 Latching/closing adjustable
8033AW	230	49	45.1	19	178	40~65	≤950	双段调速 Latching/closing adjustable
8033BW	230	49	45.1	19	178	40~65	≤950	双段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable
8033CW	230	49	45.1	19	178	40~65	≤950	双段调速/缓冲+延时功能 Latching/closing adjustable Backcheck Delay action adjustable

Perfectionists for your life


Continuous adjustable to shutdown speed and lockup speed: The fast speed can be adjusted to within 3 seconds lock the door beginning from 90° slowness shutdown can reach to 60 seconds or above.

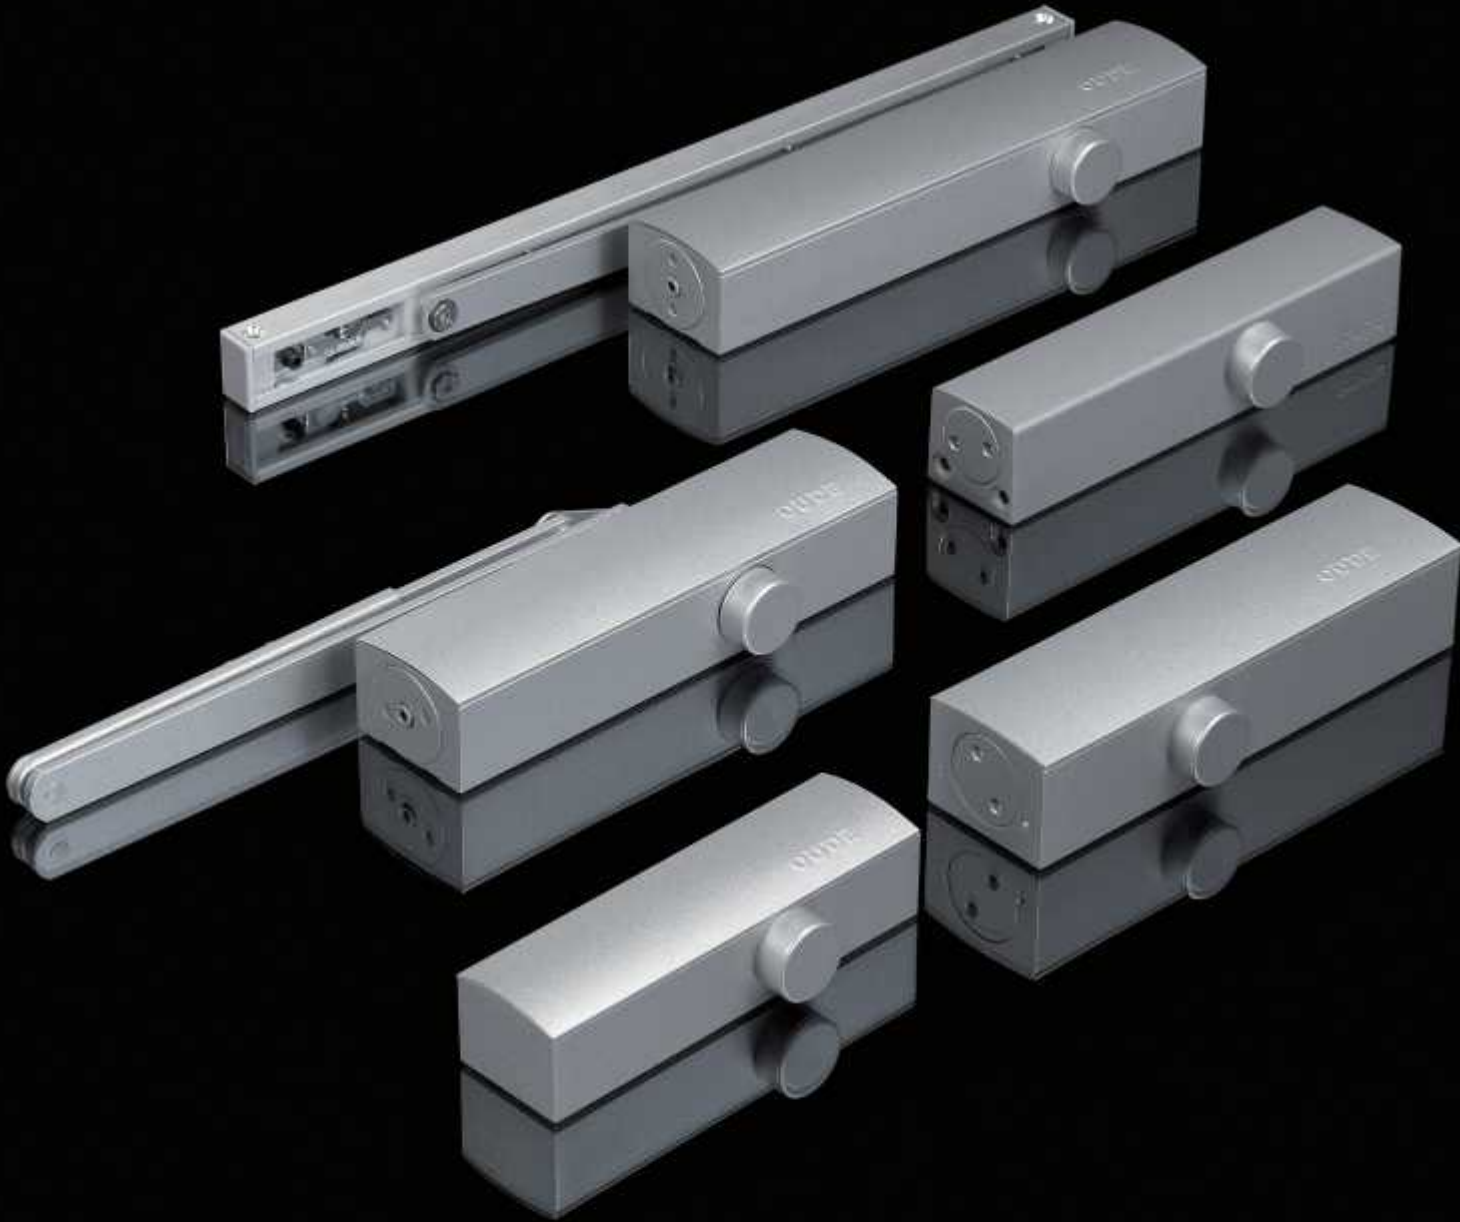

DC1-6 Series



力度调节
moment of force adjustment

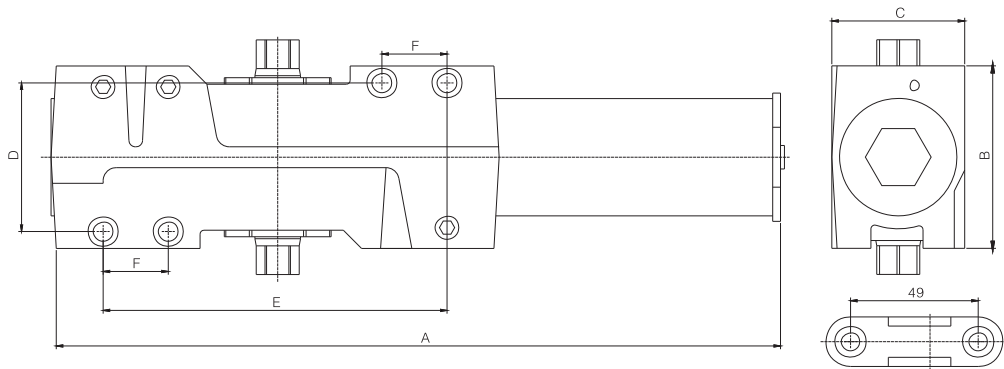

主要参数 Main parameter										
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension			适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E	F				
DC1-6	280	70	51	57	127	25.5	15~150	≤1500	双段调速/缓冲功能 Latching/closing adjustable Backcheck adjustable	具有力度调节功能 Power adjustable by spring

DC96

Cam action Series




力量调节功能
Moment of force adjustment

滑轮
Wheel

定位弹片
Hold open cushion

入锁速度调节
latching speed adjusted valve

关闭速度调节
closing speed adjusted valve

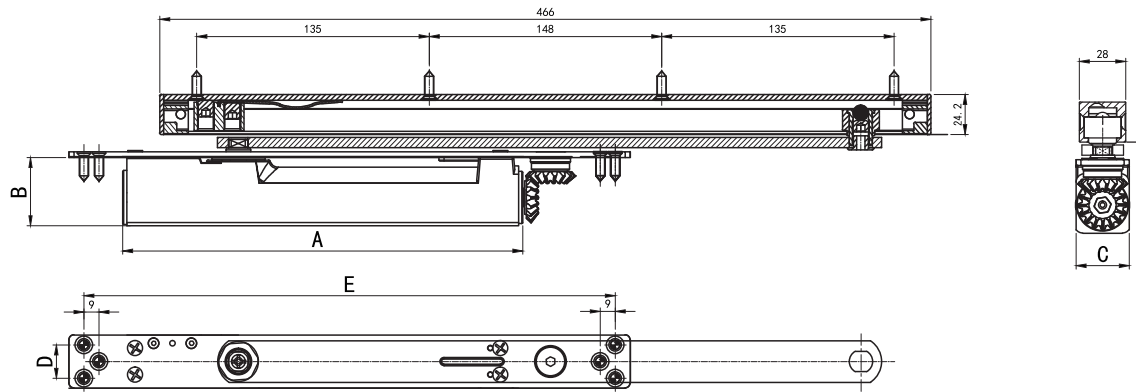


主要参数 Main parameter							
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)
	A	B	C	D	E		
DC962-4AWH	241	42	32	20	320	45~85	≤1100
				凸轮结构传动/双段调速 闭门力量可调/不分左右手 Cam action Latching/closing adjustable closing adjustable Non-handed install			
				配滑轨摇臂 滑轮弹片定位 Sliding channel install Hold open spring cushion design			

M96

Cam action Series




力量调节功能
Moment of force adjustment

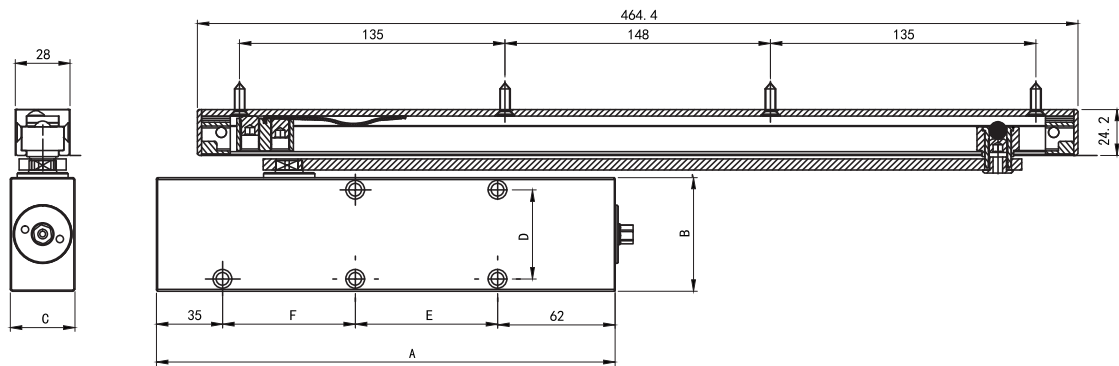

主要参数 Main parameter										
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension			适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E	F				
M962-4AWH	242	60	34	47	75	70	45~85	≤1100	明装式凸轮结构传动/双段调速 力量可调/不分左右手 Surface mounting Cam action design Latching/closing adjustable Power adjustable by spring Non-handed install	配滑轨摇臂 滑轮弹片定位 Sliding channel install Hold open spring cushion design

D1103 Series

Glass Door Closer 玻璃门液压闭门器

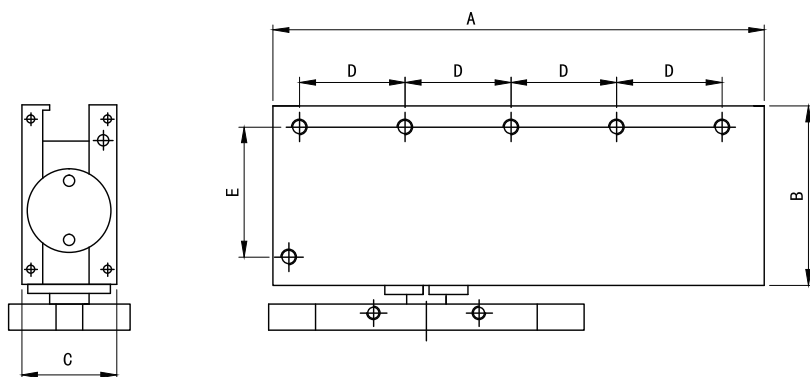

主要参数 Main parameter									
Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E				
D1103AW	186	68	36	40	49.3	45~65	≤950	凸轮结构传动/二段调速 不分左右手 Cam action Latching/closing adjustable Non-handed install	玻璃门液压闭门器 Use for glass doors
D1104AW	186	68	36	40	49.3	80 ~ 120	≤1200	凸轮结构传动/二段调速 不分左右手 Cam action Latching/closing adjustable Non-handed install	玻璃门液压闭门器 Use for glass doors

OD9000 Series



力度调节
moment of force adjustment



缓冲调节
back check valve

延时速度调节
time delay adjust valve

关闭速度调节
closing speed adjusted valve

入锁速度调节
latching speed adjusted valve




OUDE

Professional
door closer manufacturer

9000系列闭门器是具有外形优美，结构先进，性能良好的四阀闭门器。关门锁门速度可调。门开至65度以后有缓冲功能，可调节。180度范围内关门时有延时功能，可调节。关门力度可调节。闭门器可选择门上垂直，上门框垂直，平行及滑轨安装形式可配各种金属罩壳（渡亮铬，钛金，渡镍及拉丝），可任意选择

Elegant and beautiful in appearance with strong ornamental characteristic provided with four valves. The speed of closing and latching can be adjusted. When the door open to 65 degree. The door closer have back check fuction. And the function can be adjusted. Have time delay function when the closing the door from 180 degree to 65degree. And the function can be adjusted. The power of closing door can be adjusted. Vertical on the door, vertical on the doorframe, parallel and sliding installation styles can be selected. Can match with all kinds of metaline cover (Plating chromium, nickel, Titanium and wire drawing). The finished colour can be selected

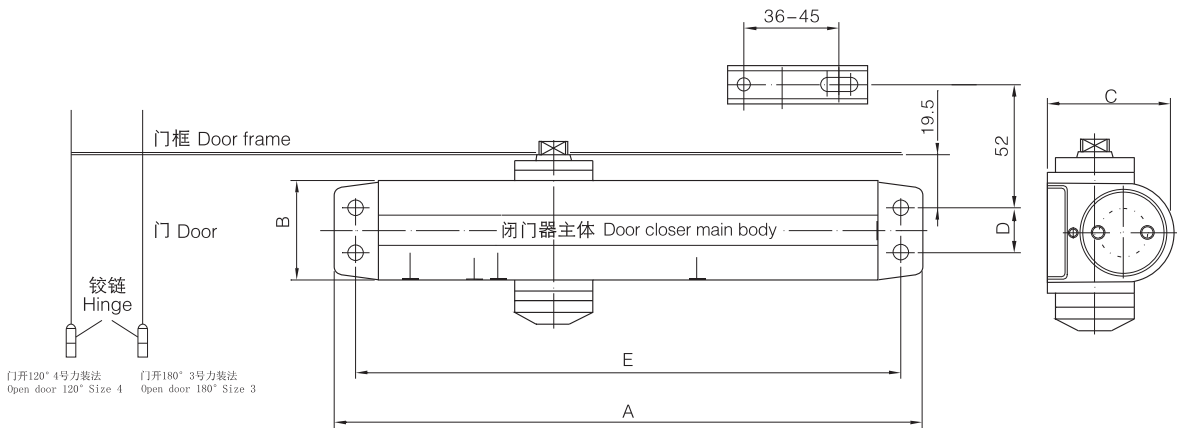

主要参数 Main parameter

Item	外形尺寸(mm) Overall dimension			安装尺寸(mm) Installation dimension		适用门重 Applicable door weight(kg)	适用门宽 Applicable door width(mm)	具备功能 Function	(请按产品说明书安装) Please install according to the instruction
	A	B	C	D	E				
902-4CW	248	42	52	19	230	25 ~ 85	≤1050	关门、锁门力可调/缓冲、延时功能 Latching/closing adjustable Backcheck Delay action adjustable	具有力度调节功能 Power adjustable by spring
903-6CW	297	47	57	19	280	60 ~ 150	≤1500	关门、锁门力可调/缓冲、延时功能 Latching/closing adjustable Backcheck Delay action adjustable	